


Tuya Smart (Smart Home Control App)

- Full control of your smart home devices
- Customize lighting, door sensors, sos button, smart intercom, and more directly from the mirror.

1. Download the Tuya Application

Go to Tuya > Click “+” at home page > Add devices


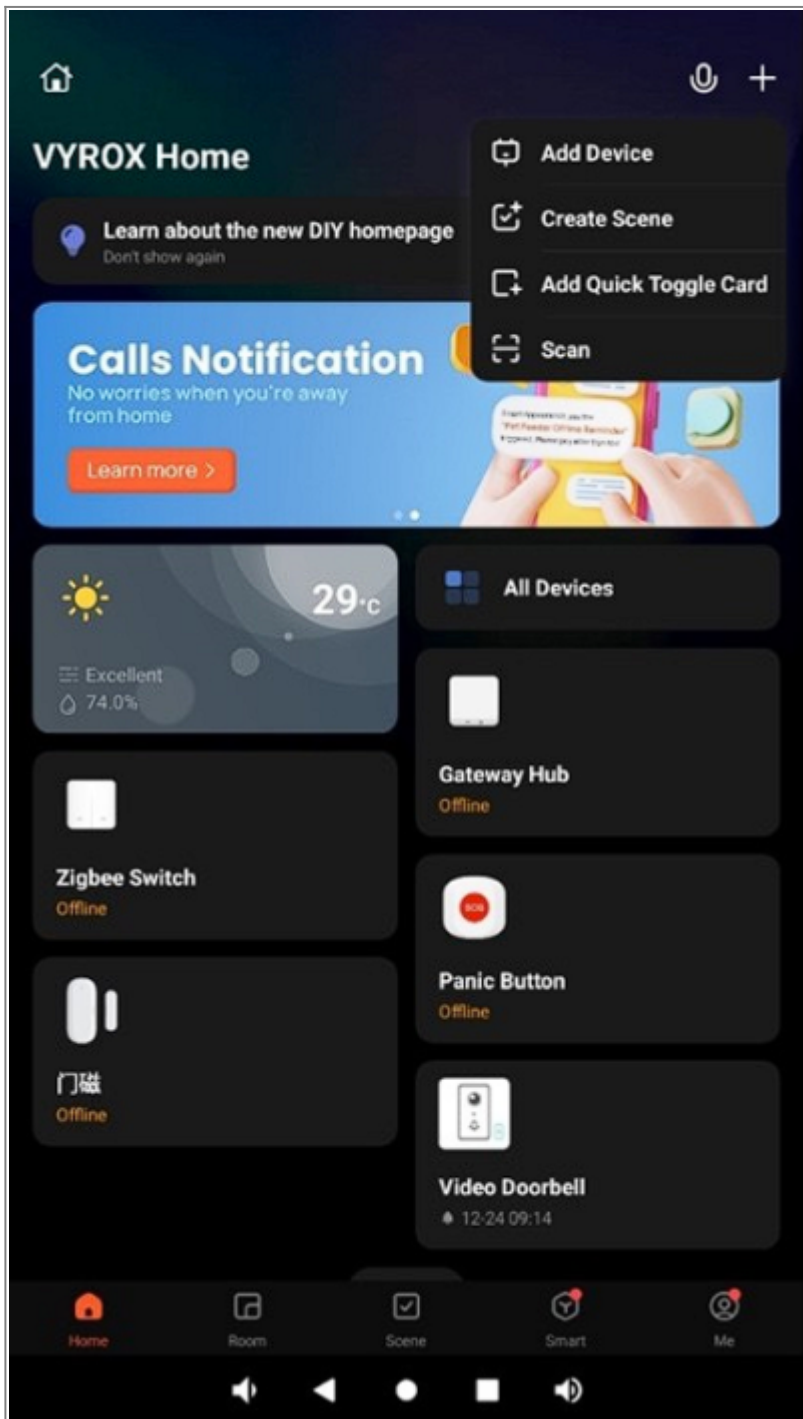


2. Register Account

Download App and Register Account



Tuya Smart (4+)
 Smart Life Smart Living
 Tuya Smart Inc.
 #56 in Utilities
 ★★★★★ 4.7 • 43.3K Ratings
 Free • Offers In-App Purchases

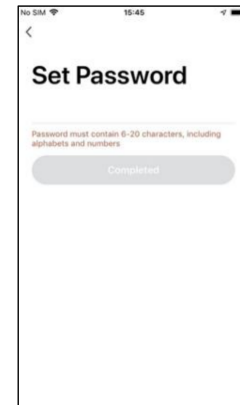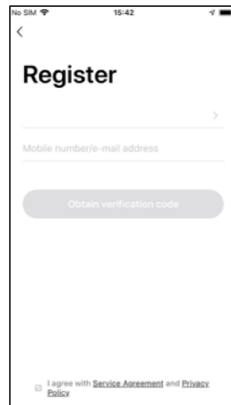

Step 1: Sign In

Search and download “Tuya Smart” in major application markets or scan the QR code below to download the App.

Step 2: Register with Your Gmail Account

Enter your Gmail and verification code to verify your system account.

Note: Must use Gmail in order to activate voice control command.


Step 3: Enter Password

Then, enter password and click “completed” to complete registration.


3. Create Houses




Create Houses

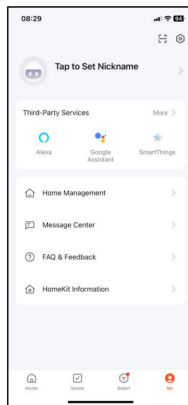

Step 1: Go to “Me”
Click “Home Management”.

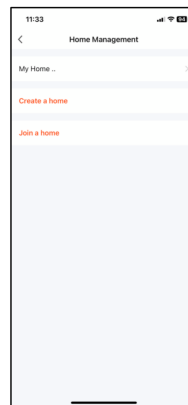


Step 2: Click “My Home ...”
Click “My Home ...”, enter home name, enter location and add area for your home. If you have more than 1 house, click “Create a home” for your next house.

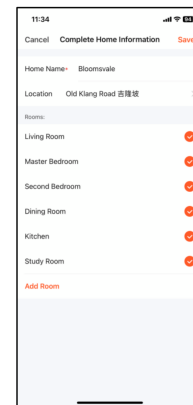


Step 3: Create room
Enter home name, enter location and click “Add Room” for additional room or area.

4. Add Family Members


Add Family Members

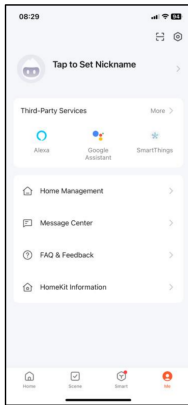

Step 1: Go to "Me"
Click "Home Management".

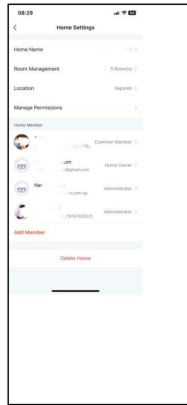

Step 2: Add Member
Click "Add Member" to invite other family members to join this house.

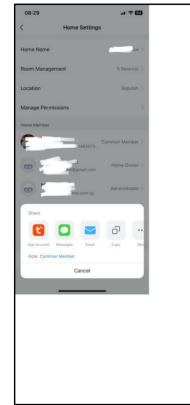

Step 3: Share
Fill in appointment date, visitor name, mobile

5. Add Device: Zigbee Gateway


Add Device: Zigbee Gateway



Step 1: Get ready Zigbee Gateway
Plug in a Zigbee gateway and connect network cable to the router.




Step 2: Connect Smart Phone with Home Router WiFi
Make sure your gateway and smart phone under same local network.

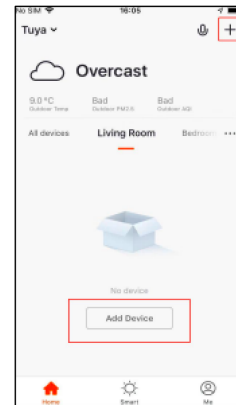

Step 3: Click "+" at right top corner
Click "Add Device"


Add Device: Zigbee Gateway

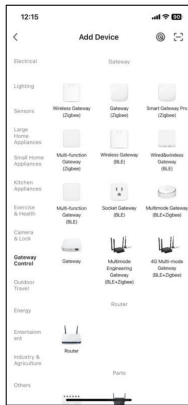


Step 4: Add Gateway Control
Select "Gateway Control" > "Gateway (Zigbee)".



Step 5: Follow Instruction in APP
Click "Confirm the indicator is blinking".

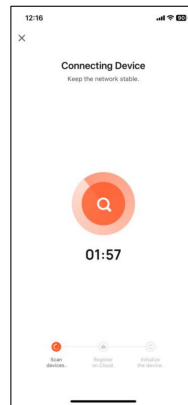


Step 6: Connecting Device
You are connecting to the gateway. Repeat the step 4 to Step 5 if you cannot connect the device until it is successfully connected.

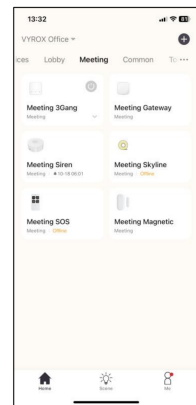



Step 7: Gateway is connected.
When gateway have been configured successfully, gateway will appear on the home page.

6. Add Lighting Control Switch into Zigbee Gateway


Add Lighting Control Switch into Zigbee Gateway

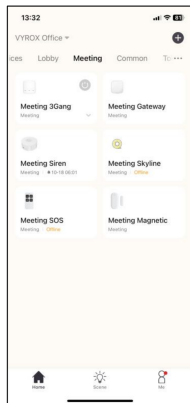

Step 1: Add lighting switch into Tuya APP
Click "Gateway" at home page, click "Add subdevice" > "Lighting" > "Light Source (Zigbee)".

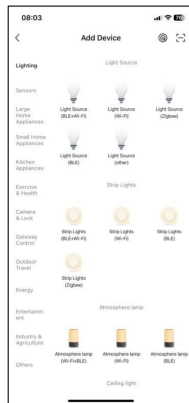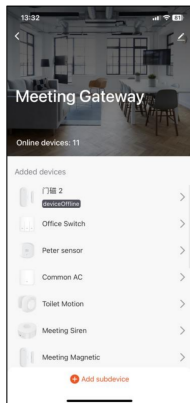


Step 2: Pair lighting switch into Zigbee Gateway
First, switch on MCB for lighting switch. Press and hold first button of lighting switch until LED blinking.

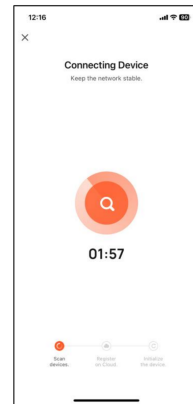

Step 3: Follow instruction
You are connecting a lighting switch to the Zigbee gateway. Repeat steps 1 to 2 if you cannot connect the device until it is successfully connected.

7. Add Door Sensor into Zigbee Gateway

Add Door Sensor into Zigbee Gateway

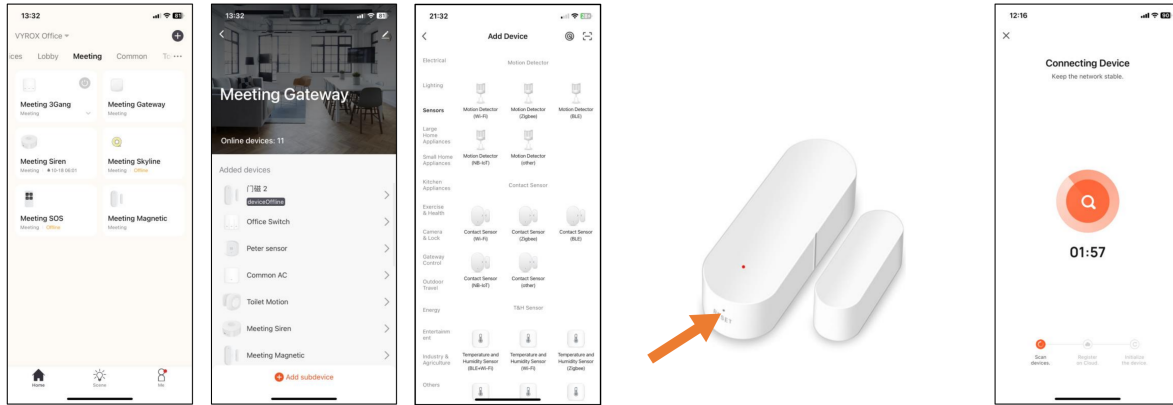


Step 1: Add door sensor into Tuya APP
 Select a "Gateway" at home page.
 Then, click "Add subdevice" > "Sensors" > "Contact Sensor (Zigbee)".

Step 2: Pair door sensor into Zigbee Gateway
 Power on the motion sensor.
 Press and hold the small button for 10 seconds until LED blinking.

Step 3: Follow instruction
 You are connecting a door sensor to the Zigbee gateway. Repeat steps 1 to 2 if you cannot connect the device until it is successfully connected.

8. Add SOS Button into Zigbee Gateway

Add SOS Button into Zigbee Gateway

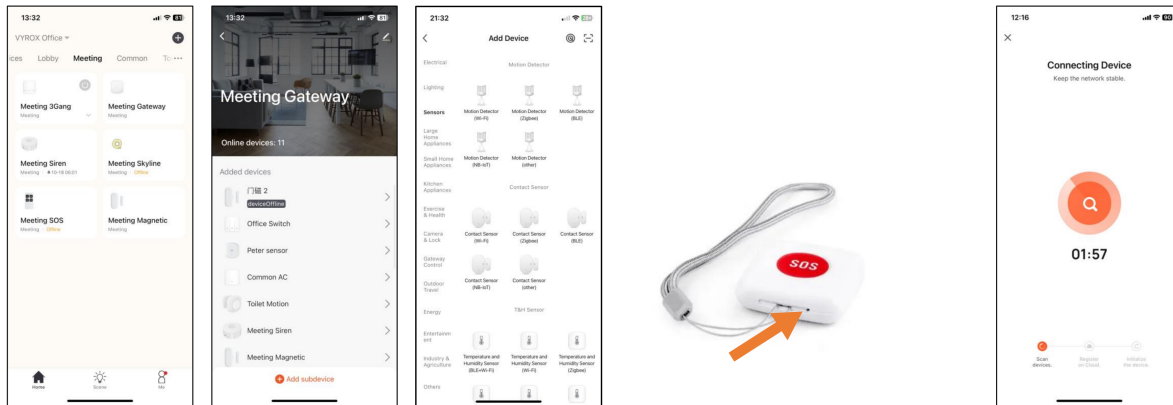


Step 1: Add SOS button into Tuya APP
 Select a "Gateway" at home page.
 Then, click "Add subdevice" > "Sensors" > "Emergency Button (Zigbee)".

Step 2: Pair door sensor into Zigbee Gateway
 Power on the SOS button.
 Press and hold the small button for 10 seconds until LED blinking.

Step 3: Follow instruction
 You are connecting a SOS button to the Zigbee gateway. Repeat steps 1 to 2 if you cannot connect the device until it is successfully connected.

9. Add Smart Intercom into Zigbee Gateway

Add Smart Intercom Into Tuya APP

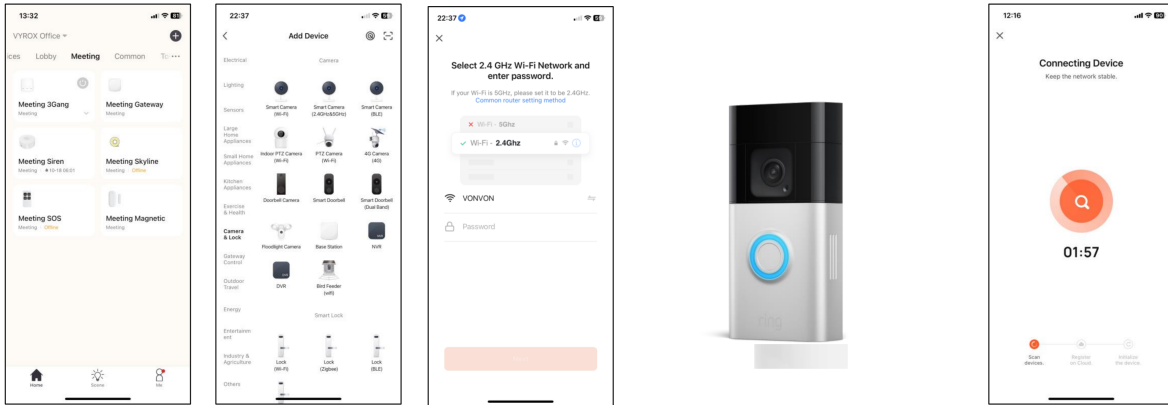


Step 1: Add Smart Camera into Tuya APP
 Click "+" at home page, next, select "Add Device".
 Then, select "Camera & Lock" > "Doorbell camera"
 Then, Confirm the WiFi network and password.
 Note: connect to 2.4GHz WiFi only.

Step 2: Follow The Instruction
 The App will prompt you to scan a QR code that needs to be read by the smart camera to initiate pairing.

Step 3: Confirm The Pairing
 Once you hear the sound prompt, confirm this on the App, this will commence the final stage of pairing the smart PTZ camera to your account.

10. Setup Google Home Voice Control To The VYROX AI Smart Mirror

Pair Smart Home Devices with Google Home Nest For Voice Control

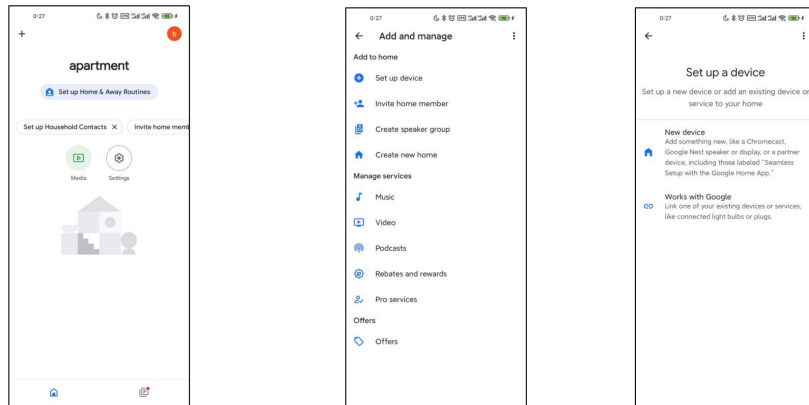


Step 1: Download Google Home App
 Search "Google Home" at App Store: iOS Phone
 Google Play Store: Android Phone
 Then, download the Google Home App.


Step 2: Login into Google Home App
 You must sign up and log in to the Google Home App with the same Gmail address that you use to log in to the Tuya Smart App.

Step 3: Pair Tuya App into Google Home App
 Click "+" at left right corner.
 Next click "Set up device",
 Then click "Works with Google".


Pair Smart Home Devices with Google Home Nest For Voice Control

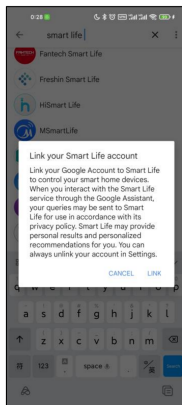

Step 4: Link with "Tuya Smart"
Search "Tuya Smart", select "Tuya Smart" and click "Link".

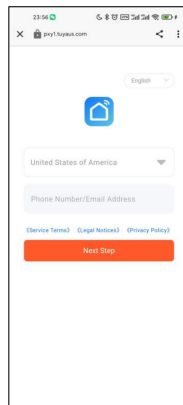

Step 5: Log in to Tuya APP
Enter the same Gmail address and password that you used to sign up for the Tuya App.

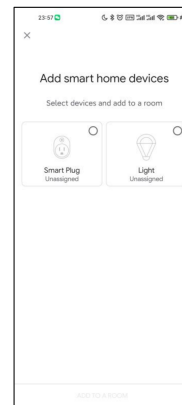

Step 6: Tuya App Successfully Paired
When the Tuya App has been successfully paired with the Google Home App, you will be prompted to add smart home devices. Please tick all devices.

From:
<https://www.vyrox.com/wiki/> - **VYROX Wiki**

Permanent link:
https://www.vyrox.com/wiki/doku.php?id=tuya_smart&rev=1740118951

Last update: **2025/02/21 06:22**

