


Tuya Smart (Smart Home Control App)

- Full control of your smart home devices
- Customize lighting, door sensors, sos button, smart intercom, and more directly from the mirror.

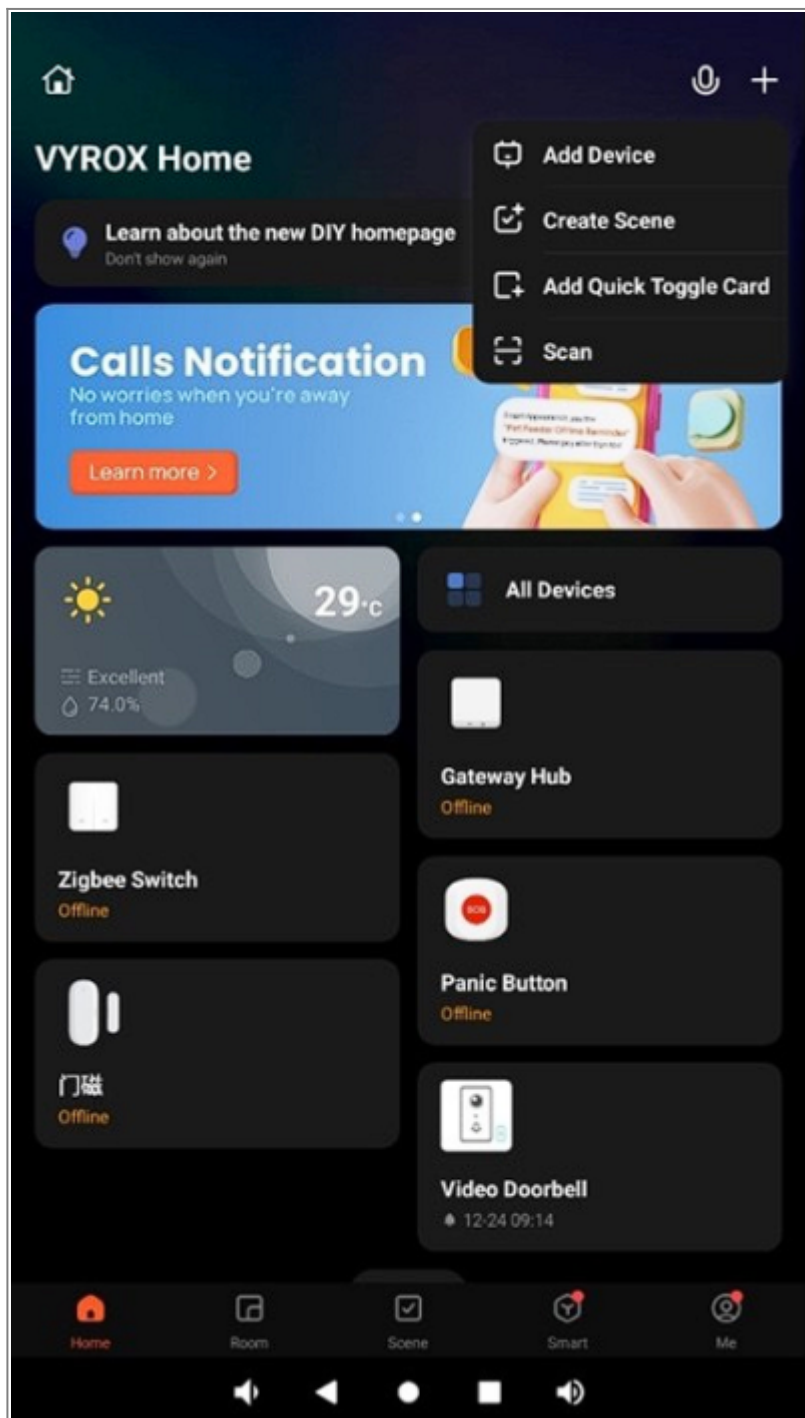


1. Download the Tuya Application

Go to Tuya > Click “+” at home page > Add devices



2. Register Account

Download App and Register Account






Step 1: Sign in
Search and download "Tuya Smart" in major application markets or scan the QR code below to download the App.

Step 2: Register with Your Gmail Account
Enter your Gmail and verification code to verify your system account.
Note: Must use Gmail in order to activate voice control command.

Step 3: Enter Password
Then, enter password and click "completed" to complete registration.

3. Create Houses

Create Houses






Step 1: Go to "Me"
Click "Home Management".

Step 2: Click "My Home ..."
Click "My Home ...", enter home name, enter location and add area for your home. If you have more than 1 house, click "Create a home" for your next house.

Step 3: Create room
Enter home name, enter location and click "Add Room" for additional room or area.

4. Add Family Members

Add Family Members



Step 1: Go to "Me"
Click "Home Management".

Step 2: Add Member
Click "Add Member" to invite other family members to join this house.


Step 3: Share
Fill in appointment date, visitor name, mobile

5. Add Device: Zigbee Gateway


Add Device: Zigbee Gateway



Step 1: Get ready Zigbee Gateway
Plug in a Zigbee gateway and connect network cable to the router.




Step 2: Connect Smart Phone with Home Router WIFI
Make sure your gateway and smart phone under same local network.




Step 3: Click "+" at right top corner
Click "Add Device"


Add Device: Zigbee Gateway




Step 4: Add Gateway Control
Select "Gateway Control" > "Gateway (Zigbee)".



Step 5: Follow instruction in APP
Click "Confirm" the indicator is blinking.




Step 6: Connecting Device
You are connecting to the gateway. Repeat the step 4 to Step 5 if you cannot connect the device until it is successfully connected.





Step 7: Gateway is connected.
When gateway have been configured successfully, gateway will appear on the home page.

6. Add Lighting Control Switch into Zigbee Gateway


Add Lighting Control Switch into Zigbee Gateway



Step 1: Add lighting switch into Tuya APP
Click "Gateway" at home page, click "Add subdevice" > "Lighting" > "Light Source (Zigbee)".


Step 2: Pair lighting switch into Zigbee Gateway
First, switch on MCB for lighting switch. Press and hold first bottom of lighting switch until LED blinking.




Step 3: Follow instruction
You are connecting a lighting switch to the Zigbee gateway. Repeat steps 1 to 2 if you cannot connect the device until it is successfully connected.

7. Add Door Sensor into Zigbee Gateway


Add Door Sensor into Zigbee Gateway



Step 1: Add door sensor into Tuya APP
Select a "Gateway" at home page. Then, click "Add subdevice" > "Sensors" > "Contact Sensor (Zigbee)".






Step 2: Pair door sensor into Zigbee Gateway
Power on the motion sensor. Press and hold the small button for 10 seconds until LED blinking.



Step 3: Follow instruction
You are connecting a door sensor to the Zigbee gateway. Repeat steps 1 to 2 if you cannot connect the device until it is successfully connected.

8. Add SOS Button into Zigbee Gateway

SOS Add SOS Button into Zigbee Gateway






Step 1: Add SOS button into Tuya APP
Select a "Gateway" at home page. Then, click "Add subdevice" > "Sensors" > "Emergency Button (Zigbee)".

Step 2: Pair door sensor into Zigbee Gateway
Power on the SOS button. Press and hold the small button for 10 seconds until LED blinking.

Step 3: Follow instruction
You are connecting a SOS button to the Zigbee gateway. Repeat steps 1 to 2 if you cannot connect the device until it is successfully connected.

9. Add Smart Intercom into Zigbee Gateway

Add Smart Intercom into Tuya APP





Step 1: Add Smart Camera into Tuya APP
Click "+" at home page, next, select "Add Device". Then, select "Camera & Lock" > "Doorbell camera". Then, confirm the WiFi network and password. Note: connect to 2.4GHz WiFi only.

Step 2: Follow The Instruction
The App will prompt you to scan a QR code that needs to be read by the smart camera to initiate pairing.

Step 3: Confirm The Pairing
Once you hear the sound prompt, confirm this on the App, this will commence the final stage of pairing the smart PTZ camera to your account.

10. Setup Google Home Voice Control To The VYROX AI Smart Mirror

Pair Smart Home Devices with Google Home Nest For Voice Control









Step 1: Download Google Home App
Search "Google Home" at App Store: iOS Phone. Google Play Store: Android Phone. Then, download the Google Home App.

Step 2: Login into Google Home App
You must sign up and log in to the Google Home App with the same Gmail address that you use to log in to the Tuya Smart App.

Step 3: Pair Tuya App into Google Home App
Click "+" at left right corner. Next click "Set up device". Then click "Works with Google".

Pair Smart Home Devices with Google Home Nest For Voice Control

Step 4: Link with "Tuya Smart"
Search "Tuya Smart", select "Tuya Smart" and click "Link".

Step 5: Log in to Tuya APP
Enter the same Gmail address and password that you used to sign up for the Tuya App.

Step 6: Tuya App Successfully Paired
When the Tuya App has been successfully paired with the Google Home App, you will be prompted to add smart home devices. Please link all devices.

From:

<https://www.vyrox.com/wiki/> - **VYROX Wiki**

Permanent link:

https://www.vyrox.com/wiki/doku.php?id=tuya_smart&rev=1740118985

Last update: **2025/02/21 06:23**

